

(19) World Intellectual Property Organization
International Bureau



**(43) International Publication Date
21 July 2005 (21.07.2005)**

PCT

(10) International Publication Number
WO 2005/065931 A1

(51) International Patent Classification⁷:

B32B 3/02

Beauchamp (FR). ROQUE, Caroline [FR/FR]; Avenue Boule, Boite Postale 28, F-95250 Beauchamp (FR).

(21) International Application Number:

PCT/US2004/042555

(74) Agents: FLORCZAK, Yen, T. et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(22) International Filing Date:

17 December 2004 (17.12.2004)

(25) Filing Language:

English

(20) Publication Language:

English

(30) Priority Data:

Priority Data: 03029852.5 24 December 2003 (24.12.2003) EP


(71) **Applicant (for all designated States except US): 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).**

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: PAD ASSEMBLY

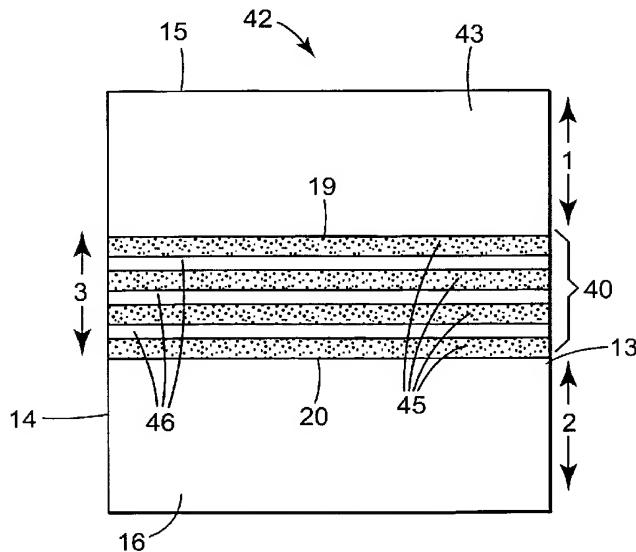

(57) Abstract: A pad assembly comprising, a plurality of flexible rectangular sheets (42), each sheet being generally of the same size and said sheets (42) having front (41) and rear (43) surfaces and peripheral edges including first (15) and second (16) opposite edges, said sheets having a band (40) of repositionable pressure sensitive adhesive coated on said rear surface (43) for adhering adjacent sheets together. Said stripes (40) being substantially parallel to the first (15) and second (16) edges and being spaced by a first predetermined spacing (1) from said first edge (15) and by a second predetermined spacing (2) from said second edge (16), wherein the ratio between the spacing from the edge (19) of the band (40) closest to said first edge (15) to said first edge and the spacing from the edge (20) of the band (40) closest to said second edge to said second edge (16) is in the range of 0.1 to 10.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*